

Q-in-Q on a page

```
EX4600-A# show interfaces ge-0/0/0
flexible-vlan-tagging;
mtu 9000;
encapsulation extended-vlan-bridge;
ether-options {
  ethernet-switch-profile {
    tag-protocol-id 0x8100;
  }
}
unit 95 {
  vlan-id 95;
}
EX4600-A# show interfaces ge-0/0/1
flexible-vlan-tagging;
native-vlan-id 150;
encapsulation extended-vlan-bridge;
unit 95 {
  vlan-id-list 100-200;
  input-vlan-map push;
  output-vlan-map pop;
}
```


```
EX4300-A# show interfaces ge-0/2/0
unit 0 {
  family ethernet-switching {
    interface-mode trunk;
    vlan {
      members VLAN108;
    }
  }
  storm-control default;
}
EX4300-A# show interfaces ge-0/0/0
unit 0 {
  family ethernet-switching {
    interface-mode trunk;
    vlan {
      members VLAN108;
    }
  }
  storm-control default;
}
EX4300-A# show vlans
VLAN108 {
  vlan-id 108;
}
```

```
EX4600-A# show vlans
VLAN95 {
  interface ge-0/0/0.95;
  interface ge-0/0/1.95;
}
```

```
EX4600-B# show vlans
VLAN95 {
  interface ge-0/0/0.95;
  interface ge-0/0/1.95;
}
```

```
EX4600-B# show interfaces ge-0/0/0
flexible-vlan-tagging;
mtu 9000;
encapsulation extended-vlan-bridge;
ether-options {
  ethernet-switch-profile {
    tag-protocol-id 0x8100;
  }
}
unit 95 {
  vlan-id 95;
}
EX4600-B# show interfaces ge-0/0/1
flexible-vlan-tagging;
native-vlan-id 150;
encapsulation extended-vlan-bridge;
unit 95 {
  vlan-id-list 100-200;
  input-vlan-map push;
  output-vlan-map pop;
}
```

```
EX4300-B# show interfaces ge-0/2/0
unit 0 {
  family ethernet-switching {
    interface-mode trunk;
    vlan {
      members VLAN108;
    }
  }
  storm-control default;
}
EX4300-B# show interfaces ge-0/0/0
unit 0 {
  family ethernet-switching {
    interface-mode trunk;
    vlan {
      members VLAN108;
    }
  }
  storm-control default;
}
EX4300-B# show vlans
VLAN108 {
  vlan-id 108;
}
```

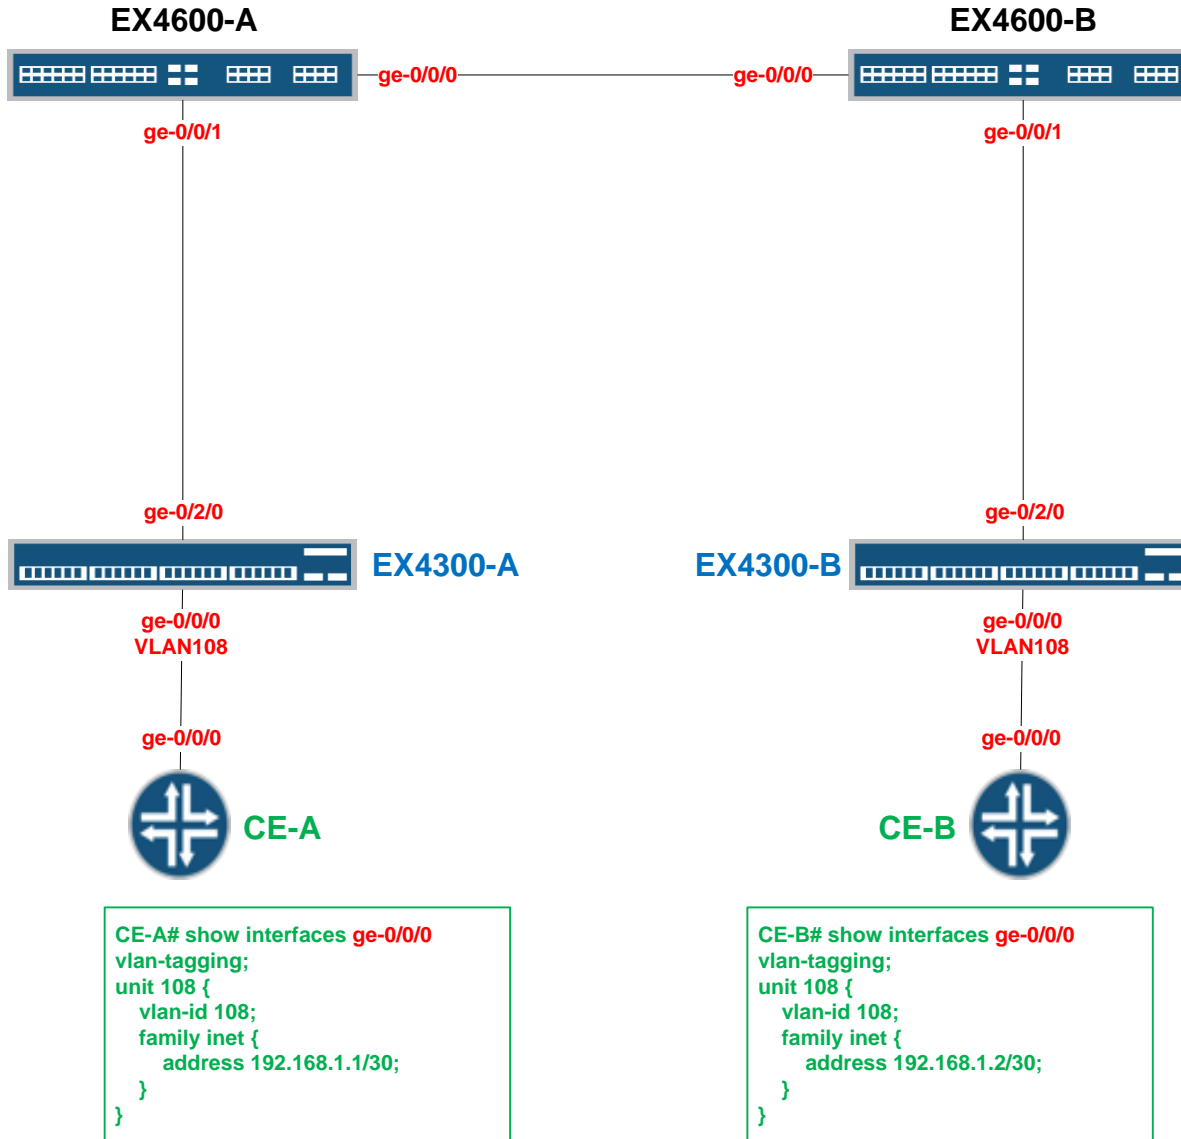

```
CE-A# show interfaces ge-0/0/0
vlan-tagging;
unit 108 {
  vlan-id 108;
  family inet {
    address 192.168.1.1/30;
  }
}
```

```
CE-B# show interfaces ge-0/0/0
vlan-tagging;
unit 108 {
  vlan-id 108;
  family inet {
    address 192.168.1.2/30;
  }
}
```